




# MODEL EZ2

## TECHNICAL SPECIFICATIONS

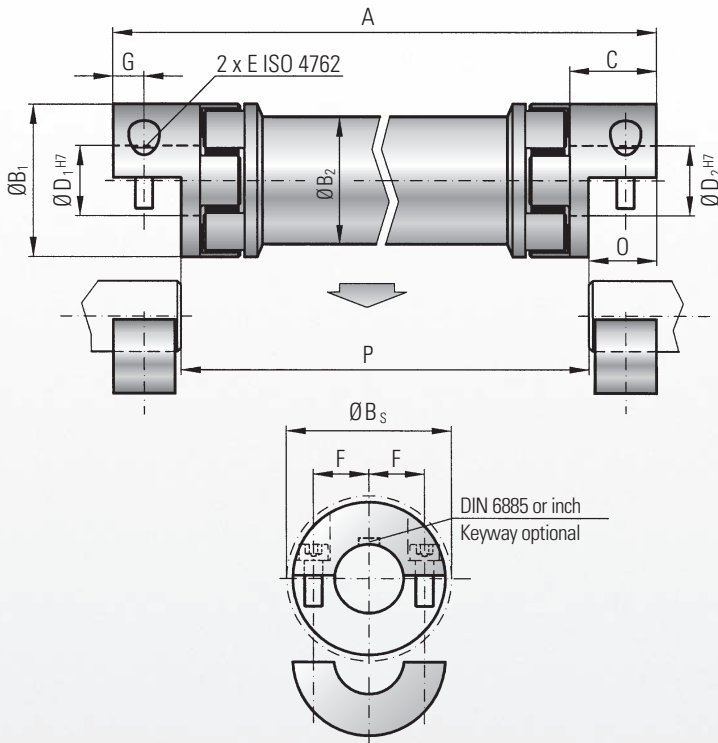


### Ordering example

EZ2 / 020 / 1200 / A / 24 / 19 / XX

Model  
Series  
Overall length  
Type Elastomer insert  
Bore Ø D1 H7  
Bore Ø D2 H7  
Non standard e.g. finely balanced

All data is subject to change without notice.

### Assembly instructions

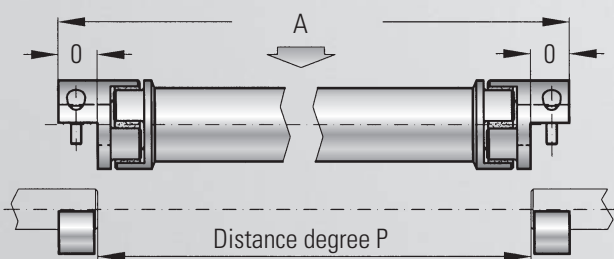

The total length of the axis is defined by the distance P + 2x0.



### Properties:

- Due to split hubs radial mounting possible
- Spans distances of up to 4 m
- No intermediate support bearing required
- Low moment of inertia
- dampens vibrations
- press-fit design
- backlash-free

### Material:

Clamping hub: up to series 450 high strength aluminum, from series 800 and up steel  
Elastomer insert: precision molded, wear resistant, and thermally stable polymer  
Intermediate tube: precision machined aluminum tube; **steel and composite tube are optionally available**

### Design:

Two coupling hubs are concentrically machined with concave driving jaws  
Elastomer inserts are available in type A or B  
The two coupling elements are connected with a precise and concentrically machined aluminum tube

### Speed:

To control the critical resonant speed please advise the application speed when ordering or inquiring about EZ Line shafts

### Tolerance:

On the hub/shaft connection 0,01 to 0,05 mm

### Torsional stiffness:

To optimize the application different elastomer inserts with different shore hardnesses are available

### R+W calculation program

With a specially developed software R+W can calculate the critical resonant speeds for each application.

Results of a calculation are shown below.

The critical speed can be altered by changing the tube material and/or other parameters.

Critical resonant speed	$n_k$	=	1/min.
Torsional stiffness tube	$C_{TZR}$	=	Nm/rad
Total stiffness EZ 2	$C_{Tdyn}^{EZ}$	=	Nm/rad
Angle of twist	$\varphi$	=	Degree-Min-Sec
Weight of total axes	m	=	kg
Critical resonance speed	$n_e$	=	1/min
Mass moment of inertia	J	=	kgm <sup>2</sup>
Permissible lateral misalignment	$\Delta Kr$	=	mm

Model EZ 2		Series													
		10		20		60		150		300		450		800	
Type (Elastomer insert)		A	B	A	B	A	B	A	B	A	B	A	B	A	B
Rated torque (Nm)	$T_{KN}$	12,5	16	17	21	60	75	160	200	325	405	530	660	950	1100
Max. torque** (Nm)	$T_{Kmax}$	25	32	34	42	120	150	320	400	650	810	1060	1350	1900	2150
Overall length (mm)	A	95 - 4.000		130 - 4.000		175 - 4.000		200 - 4.000		245 - 4.000		280 - 4.000		320 - 4.000	
Outer diameter hub (mm)	$B_1$	32		42		56		66,5		82		102		136,5	
Outer diameter tube (mm)	$B_2$	28		35		50		60		76		90		120	
Outer diameter with screwhead (mm)	$B_S$	32		44,5		57		68		85		105		139	
Fit length (mm)	C	20		25		40		47		55		65		79	
Inner diameter range H7 (mm)	$D_{1/2}$	5 - 16		8 - 25		14 - 32		19 - 35		19 - 45		24 - 60		35 - 80	
Mounting screw (ISO 4762/12.9)		M4		M5		M6		M8		M10		M12		M16	
Tightening torque of the mounting screw (Nm)	E	4		8		15		35		70		120		290	
Distance between centers (mm)	F	10,5		15,5		21		24		29		38		50,5	
Distance (mm)	G	7,5		8,5		15		17,5		20		25		30	
Mounting length (mm)	O	16,6		18,6		32		37		42		52		62	
Moment of inertia ( $10^{-3}$ kgm <sup>2</sup> )	$J_1/J_2$	0,01		0,02		0,15		0,21		1,02		2,3		17	
Inertia of tube per meter ( $10^{-3}$ kgm <sup>2</sup> )	$J_3$	0,075		0,183		0,66		1,18		2,48		10,6		38	
Dynamic torsional stiffness of the couplings (Nm/rad)	$C_{Tdyn}^E$	270	825	1.270	2.220	3.970	5.950	6.700	14.650	11.850	20.200	27.700	40.600	41.300	90.000
Torsional stiffness of tube per meter (Nm <sup>2</sup> /rad)	$C_T^{ZWR}$	321		1.530		6.632		11.810		20.230		65.340		392.800	
Distance between centers (mm)	N	26		33		49		57		67		78		94	
Length of the couplings (mm)	H	34		46		63		73		86		99		125	


Information about static and dynamic torsional stiffness as well as max. possible misalignment see page 4

1 Nm = 8,85 in lbs

\*\* Max. transferable torque of the clamping hub see EKH (page 7)

### The selection process for Servo-Insert-Couplings EZ 2

A	Overall length	m	$C_{Tdyn}^E$	Dynamic torsional stiffness of both elastomer inserts	Nm/rad	H	Length of the coupling	mm
AB	Length AB = (A - 2xN)	m	$C_T^{ZWR}$	Torsional stiffness of tube per meter	Nm <sup>2</sup> /rad	N	Distance between center lines	mm
Z	Tube length	m	$C_{Tdyn}^{EZ}$	Torsional stiffness of entire coupling	Nm/rad	$M_{max}$	Max. torque	Nm
Z = (A - 2xH)						$\varphi$	Angle of twist	degree

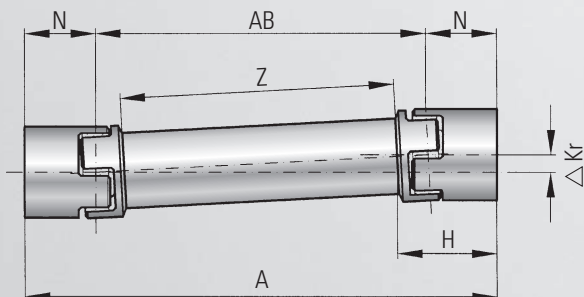

#### ■ According to torsional stiffness

$$C_{Tdyn}^{EZ} = \frac{C_{Tdyn}^E \times (C_T^{ZWR}/Z)}{C_{Tdyn}^E + (C_T^{ZWR}/Z)} \quad (\text{Nm/rad})$$

#### ■ According to angle of twist

$$\varphi = \frac{180 \times M_{max}}{\pi \times C_{Tdyn}^{EZ}} \quad (\text{degree})$$

#### ■ Max. possible misalignments

